


**CTK**ENJOY
SURROUND
SOUND

CTK BLOCK PRO

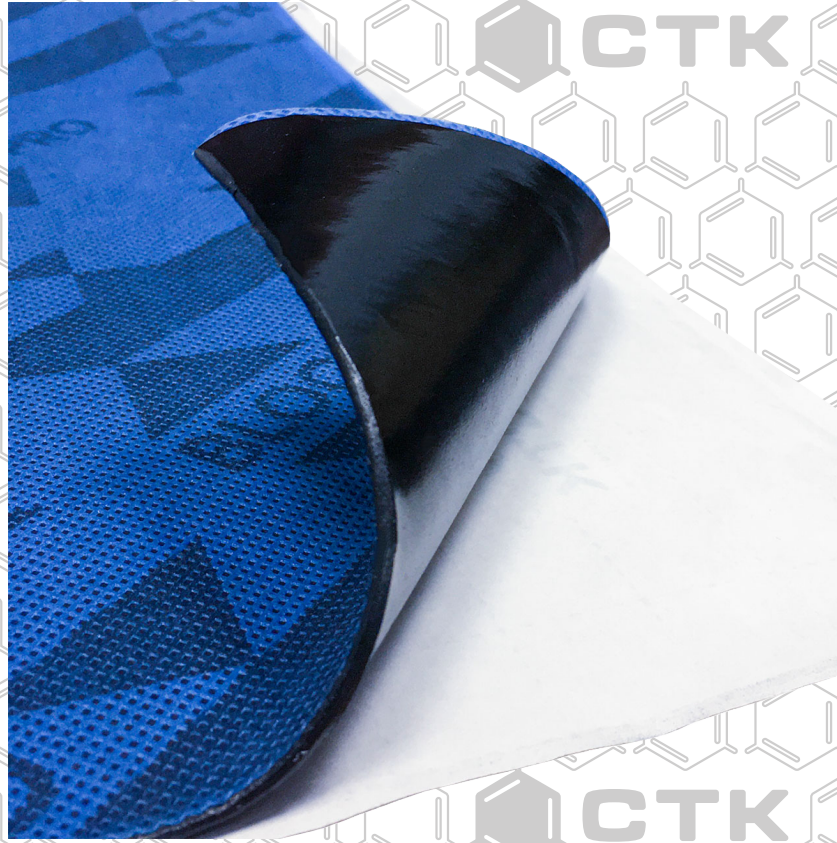

Technical characteristics

Thickness	2.0 mm	3.0 mm.
Sheet size	370*500	370*500
Weight per 1 sheet	0.575 kg.	0.855 kg.
Weight per package	9.45 kg.	10.51 kg.
Weight per SQR.M	3.19 kg.	4.73 kg.
Package on pallet	84	84
MLF	0.29	0.39
Sheets in package	16	12
SQR.M per package	2.96 kg.	2.22
SQR.M per pallet	248.64	186.48

Block Pro is an effective acoustic membrane material based on a non-woven fabric on a polymer layer with improved adhesion properties. The material guarantees a high index of sound insulation properties.

Block Pro is intended for application as a final third layer on the most noisy parts of the carbody. It should be applied only on horizontal surfaces! Block Pro is flexible and does not lose efficiency in a wide range of temperatures.

Recommended application temperature (°C) - from +10 to +30.

Operating temperature (°C) - from -40 to +100.

	Where to use?	
Thickness	2.0 mm.	3.0 mm.
Door		
Hood		
Trunks	✓	✓
Floor	✓	✓
Ceiling		
Wheel arches		